

## WHIRL SYSTEMS ORDER FORM FOR INSTALLERS AND WHOLESALERS

### CUSTOMER DATA

Customer (company):

6-digit KALDEWEI customer number:

Contact:

Contact details (telephone, email):

Order details:

### BATHTUB

Model name:

Model No.:

Colour:

- Anti-slip\* (only for BODY and FULL BODY whirl systems)
- Full anti-slip\* (only for BODY and FULL BODY whirl systems)
- Easy-clean finish\*
- Special drilling\* (Please enclose installation sketch or dimensioned sketch with hole and rosette diameter and substructure)

### BATHTUB GRIPS (For AQUAMASSAGE BODY only possible as a special drilling)

Hole for bath grips (grips must be ordered separately):  No  Yes

### WHIRL SYSTEM

(See reverse for drawings)

COMBIMASSAGE BODY & SOUL

AQUAMASSAGE FULL BODY

AIRMASSAGE SOUL

AQUAMASSAGE BODY

Deviating from the standard version:

- Left-hand version (intended for revision on the right-hand side)

Deviating from the standard version:

- External control panel without special drilling in the bathtub level\*
- External control panel with special drilling in the bathtub level (e.g. on marble top)\*

Deviating from the standard version (only relevant for Meisterstück models and free-standing bathtubs):

- Waste fitting with 1 1/2" thread for different siphon heights (e.g. for Macau, Hong Kong and Singapore)

### COLOUR WHIRL VISIBLE PARTS (Control element white glass, except for AQUAMASSAGE BODY)

- White (standard version)  Chrome\*

### WASTE AND OVERFLOW SET

- Standard waste and overflow set  Waste and overflow set and waterfall inlet\*
- Waste and overflow set with integrated filling function\*

### ACCESSORIES Further accessories\* can be found in the price list.


### MAINS VOLTAGE FOR WHIRL SYSTEM

As standard, all whirl systems are operated with a mains voltage of 50 Hz. If, in exceptional cases, such as on cruise ships, a 60 Hz voltage is required, this is possible on request.

- 50 Hz (standard version)  60 Hz  unknown

### OTHER REMARKS

## RIGHT VERSION

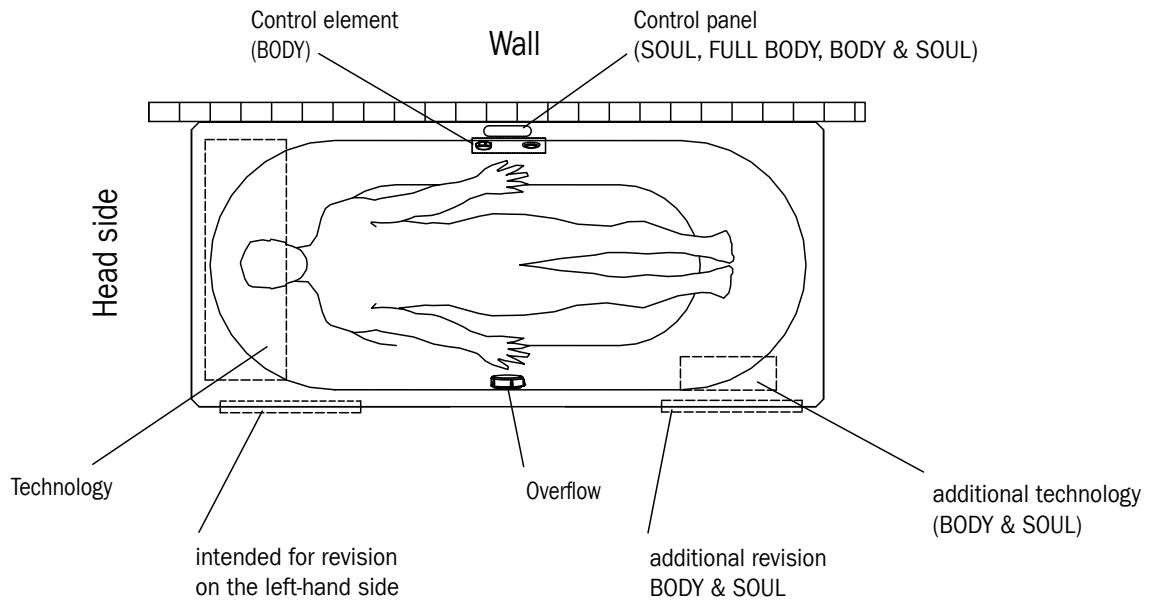

## LEFT VERSION

