

SCONA

- harmonious design with centrally-placed waste
- can be installed absolutely flush to floor
- also available in the shades of the Coordinated Colours Collection
- made of KALDEWEI steel enamel
- flush-fitting recessed waste cover (only in combination with the KA 90 waste fittings)




Similar illustration


| | Combined Tray & Waste depth | Waste fitting depth |
|------------------|-----------------------------|---------------------|
| KA 90 | 103 | 81 |
| KA 90 extra flat | 92 | 70 |
| KA 90 ultra flat | 83 | 61 |
| KA 90 vertical | 49 | 81 |

See page 275.

Model 968

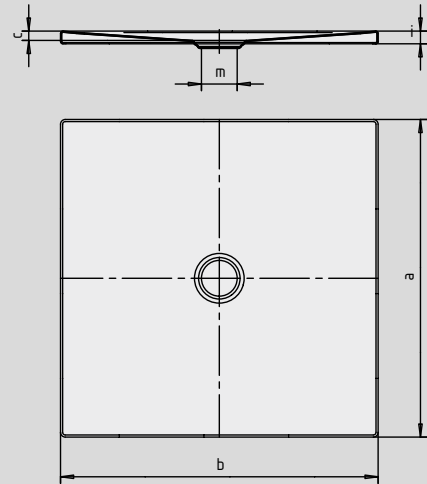


Model 977

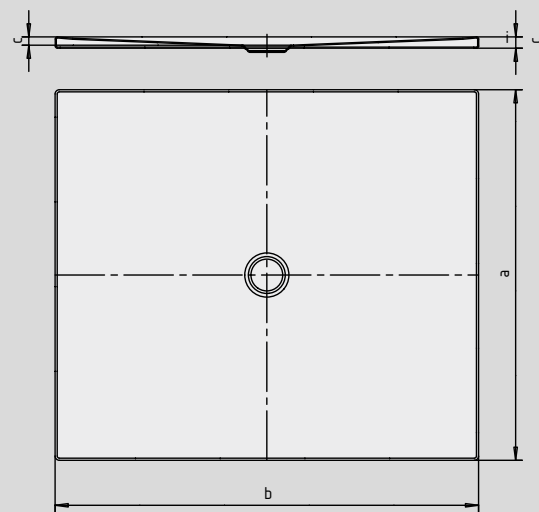

SECURE⁺

| Model No. | 968 | 969 | 970 | 972 | 974 | 975 | 976 | 919 | 977 |
|---|-----|-------------|------------|------------|------------|------------|------------|------------|--------------|
| External length | a | 1200 | 800 | 900 | 1000 | 700 | 750 | 800 | 1000 mm |
| External width | b | 1200 | 1300 | 1300 | 1300 | 1400 | 1400 | 1400 | 1400 mm |
| Depth | c | 23 | 23 | 23 | 23 | 23 | 23 | 23 | 23 mm |
| Height of rim | i | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 mm |
| Diameter of drain hole | m | 90 | 90 | 90 | 90 | 90 | 90 | 90 | 90 mm |
| Weight of the enamelled shower tray in kg | | 37 | 26 | 30 | 34 | 25 | 27 | 29 | 31 |
| Anti-slip | | 492 x 492 | 492 x 492 | 492 x 492 | 492 x 492 | 492 x 492 | 492 x 492 | 492 x 492 | 492 x 492 mm |
| Full anti-slip | | 1172 x 1172 | 740 x 1220 | 836 x 1220 | 932 x 1220 | 644 x 1316 | 692 x 1316 | 740 x 1316 | 836 x 1316 |
| SECURE PLUS | | all-over | all-over | all-over | all-over | all-over | all-over | all-over | all-over |



The TÜV Rheinland confirms the following properties of KALDEWEI's anti-slip, full anti-slip and SECURE PLUS finish:

- Assessment group **B** for wet barefoot areas (**DIN 51097**)
- Assessment group **R 10** for slip-resistant properties in work rooms and areas with an increased risk of slipping (**DIN 51130**)

All SCONA models are available either with anti-slip, full anti-slip or SECURE PLUS.

Model 968 with full anti-slip or SECURE PLUS fits DIN barrier-free 18040-2.