


INSTALLATION SYSTEM ESR FLOOR-LEVEL

- For easy and secure floor-level installation of rectangular KALDEWEI shower surfaces
- Pre-assembled aluminium frame as perfect fit for the shower surface
- Complete system with all relevant installation components
- 3D Flex leg system with horizontal and vertical adjustment works around any obstacles in the floor
- More flexibility in coordinating trades - ESR can be positioned before or after screed recess, shower surface is installed last, after completion of all screed work and tiling.

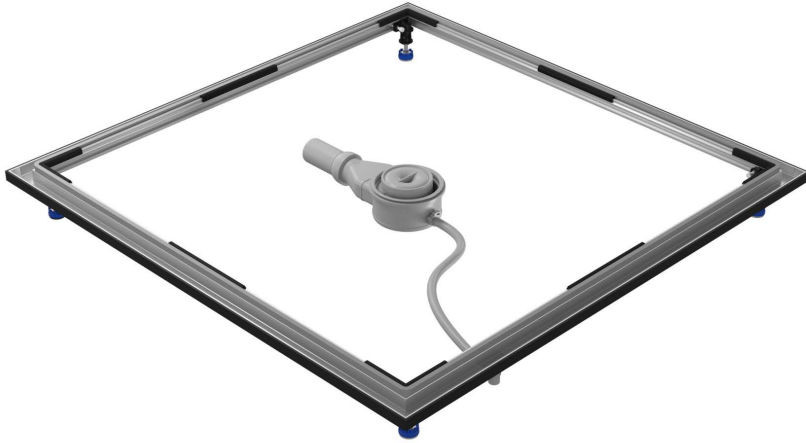

Similar illustrations

Installation height special support	49 mm
Installation height adjustment unit I	63-77 mm
Installation height adjustment unit II	75-99 mm
Installation height adjustment unit III	97-131 mm
Installation height adjustment unit III+V	131-164 mm
Space for wall tile	10 mm
Top edge frame to top edge shower tray	20 mm

The Fraunhofer Institut Bauphysik, IBP, certifies compliance of the ESR FLOOR-LEVEL with the sound insulation requirements of DIN 4109, DIN 4100 and SIA 181.
(see KALDEWEI sound insulation certificates for details)


INSTALLATION

INSTALLATION SYSTEM ESR FLOOR-LEVEL

Installation system ESR floor-level*	Order no.	Dimensions of shower tray cm	Dimensions of ESR floor-level cm	Number of foot units	GBP
Standard accessories	640000100000	75 x 80	77,8 x 82,8	4	
• SEALING KIT FLOOR-LEVEL ESR with sealing tape, 2 corner profiles, 4 multifunctional corners	640000110000	80 x 80	82,8 x 82,8	4	
	640000120000	70 x 90	72,8 x 92,8	4	
	640000130000	75 x 90	77,8 x 92,8	4	
• Fleece butyl sealing strip for inner sealing	640000140000	80 x 90	82,8 x 92,8	4	
	640000150000	90 x 90	92,8 x 92,8	4	
• Pre-fitted sound insulation strip on frame	640000160000	75 x 100	77,8 x 102,8	6	
	640000170000	80 x 100	82,8 x 102,8	6	
• Sound-insulated 3D Flex leg system (height adjustment 49 to 164 mm) with floor fasteners	640000180000	90 x 100	92,8 x 102,8	6	
	640000190000	100 x 100	102,8 x 102,8	8	
	640000260000	75 x 110	77,8 x 112,8	6	
	640000200000	80 x 110	82,8 x 112,8	6	
• Allen key for height adjustment of feet	640000210000	90 x 110	92,8 x 112,8	6	
• Recess aids/formwork panels for screed recesses	640000530000	100 x 110	102,8 x 112,8	8	
• Tiling aid	640000220000	70 x 120	72,8 x 122,8	6	
	640000230000	75 x 120	77,8 x 122,8	6	
	640000240000	80 x 120	82,8 x 122,8	6	
	640000250000	90 x 120	92,8 x 122,8	6	
Accessories required (not included)	640000270000	100 x 120	102,8 x 122,8	8	
• Waste fitting KA with anti-seepage connection	640000280000	120 x 120	122,8 x 122,8	8	
• A central support is recommended for dimensions greater than 90 x 90 cm. We recommend using the KALDEWEI central support system MAS.	640000290000	80 x 130	82,8 x 132,8	6	
	640000300000	90 x 130	92,8 x 132,8	6	
	640000310000	100 x 130	102,8 x 132,8	8	
	640000320000	70 x 140	72,8 x 142,8	6	
	640000330000	75 x 140	77,8 x 142,8	6	
	640000340000	80 x 140	82,8 x 142,8	6	
	640000350000	90 x 140	92,8 x 142,8	6	
	640000360000	100 x 140	102,8 x 142,8	8	
	640000370000	70 x 150	72,8 x 152,8	6	
	640000380000	75 x 150	77,8 x 152,8	6	
	640000540000	80 x 150	82,8 x 152,8	6	
	640000390000	90 x 150	92,8 x 152,8	6	
	640000400000	100 x 150	102,8 x 152,8	8	
	640000410000	150 x 150	152,8 x 152,8	8	
	640000420000	70 x 160	72,8 x 162,8	8	
	640000430000	75 x 160	77,8 x 162,8	8	
	640000550000	80 x 160	82,8 x 162,8	8	
	640000440000	90 x 160	92,8 x 162,8	8	
	640000450000	100 x 160	102,8 x 162,8	10	
	640000460000	70 x 170	72,8 x 172,8	8	
	640000470000	75 x 170	77,8 x 172,8	8	
	640000480000	90 x 170	92,8 x 172,8	8	
	640000490000	100 x 170	102,8 x 172,8	10	
	640000500000	80 x 180	82,8 x 182,8	8	
	640000510000	90 x 180	92,8 x 182,8	8	
	640000520000	100 x 180	102,8 x 182,8	10	
OPTIONAL: KALDEWEI PROFESSIONAL INSTALLATION					
Kaldewei mounting adhesive, 310 ml for bonding the sealing components	584574690000				

* Available from 1 May 2018.

EXTENSION KIT FOR ESR FLOOR-LEVEL

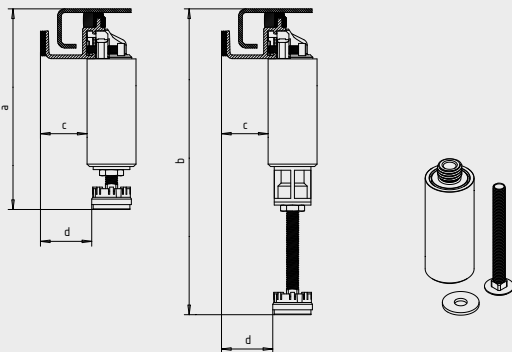

Installation height, min.	a	164 mm
Installation height, max.	b	250 mm
Distance tray edge to extension unit	c	38 mm
Distance tray edge to foot cap	d	42 mm

Ensure correct number of foot units for the installation system	Order no.	GBP
Extension kit for 4 foot units	640001010000	
Extension kit for 5 foot units	640001020000	
Extension kit for 6 foot units	640001030000	

• = separate accessories

KALDEWEI